SCHULTE®

5026 ROTARY CUTTER

Proven Reliability & Performance Since 1992!

1. 1000 RPM drive line with heavy duty slip clutches
2. Trailing Hitch 80° constant velocity U-Joint or lower Maintenance Equal Angle Hitch non CV drive available
3. 2-piece replaceable skid shoes on wings
4. 10 GA deck with front half deck protection rings
5. 7.00 x 15 light truck tires or recapped aircraft tires in quantities of 6 or 8
6. Hydraulic phasing cylinders for level lift
7. Double acting wing lift cylinders with mechanical float
8. Spring steel bushings at all major pivot points
9. Suspension for centre and wing frames
10. Transport locks for centre section and wings
11. A fixed knife shredding blade kit is available for enhanced shredding of crop residue
12. 50° splitter box keeps drive lines short and machine more compact front to back

World Class *Built to Last*

schulte.ca

5026 Specifications

SPECIFICATIONS

	5026
Cutting Width	26′ (8m)
Overall Width	27′ (8.2m)
Overall Length	17′ (5.1m)
Cutting Height	1″-14″ (25mm-356mm)
Transport Width	117″ (3m)
Row Crop Wheel Trans. Width	-
Transport Height	-
Without hydraulic folding wing tips	148″ (12.3′ or 3.7m)
With hydraulic folding wing tips	-
Weight	7,900lbs (3583kg)
Hitch Weight	2,400lbs (1089kg)
Cutting Capacity	2″ (51mm)
Minimum Tractor Size	120hp (90kw)
Blade Tip Speed	15,300 ft/min (4663m/min)
Blade Overlap	6″ (152mm)
Divider Gearbox Rating	260hp (194kw)
T Box Rating	-
Down Box Rating	160hp (119kw)
Deck Thickness	.134″ (10ga or 3.4mm)
Skirt Thickness	.18″(4.6mm)
Inside Wing Operating Range	15° down to 45° up
Outside Wing Operating Range	-

**Based on intermittent use*

Adjustable Clevis

Precision Hitch

HITCH OPTIONS

Solid Tongue

Clevis Hitch

In wheat straw

In cotton

In corn

In rice

Pasture & CRP maintenance

Airport maintenance

OPTIONS - 5026

- Trailing hitch CV style • Equal angle hitch non CV
- Fixed knife unit with updraft or flat bottom blades
- Two blade pan kit • Two blade pan kit with shredder blades
- various chain / rubber belting safety guards
- 6 or 8 tire kits with row crop or walking axles kits
- Safety light kit • Cyclone deck debris fan kit

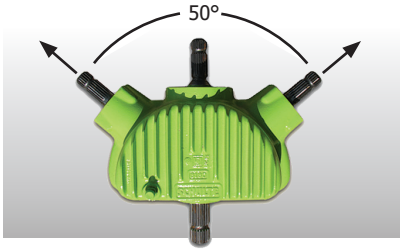

50° splitter allows for unique drive layout of rotors

Adjustable wheel standards for row crop spacing OR walking axles

Schulte Industries Ltd.
PO Box 70, Englefeld, SK Canada S0K 1N0
Ph (306) 287-3715 Fx (306) 287-3355
Email *info@schulte.ca* Web *www.schulte.ca*

MEMBER OF THE ALAMO GROUP
ALWAYS ON THE CUTTING EDGE

Certified System
ISO 9001

Sold By:

Printed in Canada *22/09/2026*

Schulte is a registered trademark of Alamo Group Inc.
Schulte Industries Ltd. reserves the right to change the design and specifications of it's products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.