SCHULTE®

ROCK WINDROWERS

SRW-1400 • SRW1000 • SRW-800 • SMR-800 • SMR-600

World Class *Built to Last*

schulte.ca

SRW-1400 Windrower

14’ Windrower forms Convenient Rows for Rock Picking

The SRW-1400 Pivoting Rock Windrower employs a side delivery frame arrangement which allows the operator to better control the size of windrows, regardless of rock conditions. The windrower’s patented floating drum arrangement allows the wheels to be placed closer to the windrower drum, resulting in excellent ground following characteristics.

Optional Gravel reclamation congiguration is a good fit for Rural Municipalities and counties to reclaim gravel from roadsides. Save money by using your grader to bring the gravel in off the shoulder and then using the Schulte SRW-1400 Pivoting Rock Windrower to spread the ridge smoothly and evenly.

Power is supplied to the windrower drum via a heavy duty PTO driveline which includes a slip clutch and shear bolt arrangement for protection against excessive shock loads.

The windrower drum is 14’ (4.27m) wide and is constructed of 8 5/8” (219mm) heavy wall HSS tube.

Hard surfaced, 5/8” (15.9mm) x 6” thick x 6” (152.4mm) long teeth are welded directly to the drum pipe, resulting in problem-free operation even in difficult conditions.

Roto-Tilling Action Breaks Lumps & Levels the Ground

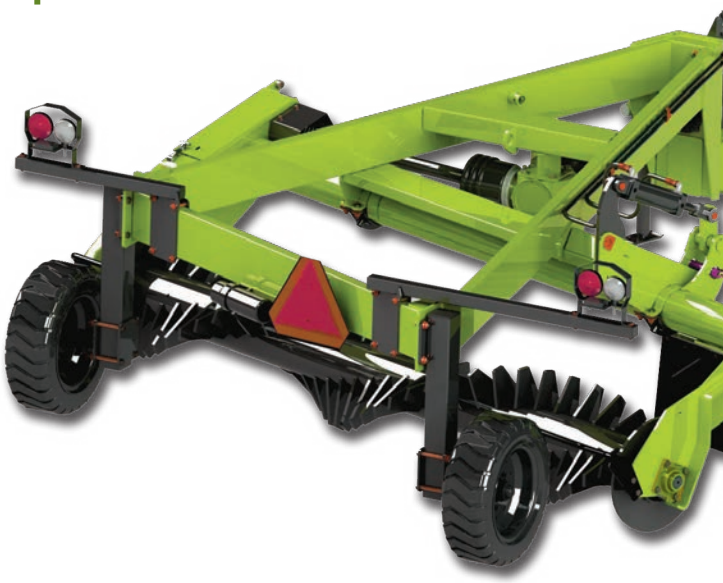

Windrows 2” to 25” rocks with ease, forming them into neat uniform rows.

Power is supplied to the windrower drum via a heavy duty PTO driveline which includes a slip clutch and shear bolt arrangement for protection against excessive shock loads.

The final drive chain is totally enclosed for longer service life. The windrower drum is 10’ (3.05m) wide and is constructed of 8 5/8” (219mm) heavy wall HSS tube.

Hard surfaced, 5/8” (15.9mm) x 6” thick (152.4mm) long teeth are welded directly to the drum pipe, resulting in problem-free operation even in difficult conditions.

Good choice for RM’s and Counties for gravel reclamation.

Cat lll hitch configuration available, perfect for larger hp tractors such as RM’s and County fleets.

Multi Purpose 3-Point Hitch Windrower Breaks Lumps & Levels Ground

The SRW-800 Pivoting Rock Windrower is designed to windrow small to medium rocks with ease, forming them into neat uniform rows ready for pickup by a Schulte Rock Picker. Roots, stumps, chips and other debris from land clearing operations can also be windrowed. As an added bonus, the windrower has roto-tilling action breaking up lumps and leveling the ground.

Power is supplied to the windrower drum via a heavy duty PTO driveline which includes a slip clutch and shear bolt arrangement for protection against excessive shock loads. The final drive chain is totally enclosed for longer service life. The windrower drum is constructed of 8 5/8" (219mm) heavy wall pipe, hard surfaced 5/8" (15.9 mm) thick teeth welded directly to the drum.

Narrow, 8.5' transport width.

The SRW-800 Pivoting Rock Windrower employs a side delivery frame allowing the operator to better control the size of windrows, regardless of rock conditions. The SRW800 is the perfect tool for contractors, landscape companies and farmers.

Heavy duty PTO driveline

Fully enclosed final drive chain

A Perfect Tool for Any of Your Land Maintenance Needs

The rototilling action of the SMR-800 breaks lumps, roots and other debris while reclaiming rocks by forming them in uniform rows.

The 4” teeth give you greater ground penetration and are made of wear resistant Hardox 450.

The SMR-800 is chain driven to keep the hydraulic motor out of harm’s way.

Option for standard solid mount or floating mount that can pivot up to 20° left or right, manually or hydraulically.

Solid mounted 23” forklift grade tires for increased maneuvering and rugged durability.

High or low flow hydraulic options.

Available in Cat lll hitch for smaller hp tractors.

Standard Mount Shown

Drum angle movement 20° left or right

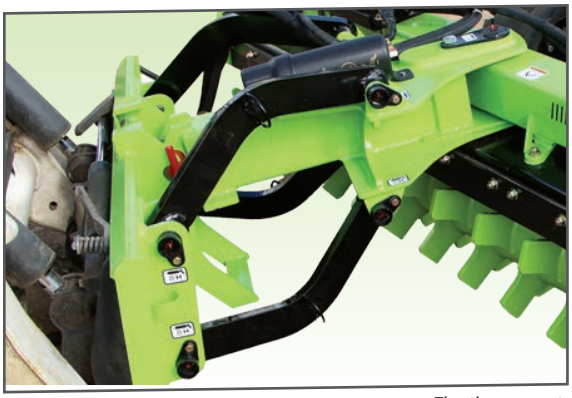

Floating mount

Replaceable teeth
4” & 2 1/2”

Before Multi Rake use

After Multi Rake use

SMR-600 Windrower

The Perfect Tool for Your Skid Steer
Landscaping & Sweeping

The rototilling action of the SMR-600 & SMR-800 breaks lumps, roots and other debris while reclaiming rocks by forming them in uniform rows.

The 4” teeth give you greater ground penetration and are made of wear resistant Hardox 450.

The SMR-600 & SMR-800 are chain driven to keep the hydraulic motor out of harm’s way.

Option for standard solid mount or floating mount that can pivot up to 20 degrees left or right, manually or hydraulically.

Solid mounted 23” forklift grade tires for increased maneuvering and rugged durability.

High or low flow hydraulic options.

Great for land use preparation



Floating mount

Replaceable teeth
4” & 2 1/2”

Gearbox features reversable tensioner and heavy 80 chain which decreases downtime.

Match your Schulte Windrower with a Schulte Conveyor Type or Reel Type Rock Picker

5000 Titan

RS-320

High Rise 8000

2500 Giant

Specifications

SPECIFICATIONS	SRW-1400	SRW-1000	SRW-800	SMR-800	SMR-600
Weight	3500lb (1588kg)	2660lb (1206kg)	1350lb (613kg)	1900lb (862kg)	1600lb (725kg)
Tractor Horsepower	40-150HP (30-112KW)	40-150HP (30-112KW)	35-100HP (30-60KW)	-	-
Drum Width	14' (4270mm)	10' (3050mm)	88 5/8" (2215mm)	89" (2.26m)	73" (1.85m)
Maximum Ground Speed	5mph (8 kph)	5mph (8 kph)	5mph (8 kph)	-	-
Recommended Ground Speed	2mph (3kph)	2mph (3kph)	2mph (3kph)	-	-
Drum Speed	117rpm @540rpm input	117rpm @540rpm input	102rpm @540rpm input	220-250rpm	220-250rpm
Tires	Light truck tires	22" forklift tires (56cm)	16.5/6.5 x 8	23" forklift (58cm)	23" forklift (58cm)
Transport Width	93" (2.36m)	134" (3.4m)	102" (2.59m)	102" (2.59m)	88" (2.23m)
Transport Length	235" (5.97m)	179" (4.55m)	67" (1.7m)	1 5/8" (41mm)	-
Hydraulic Low Flow Option	-	-	-	18-24gpm (68lpm-90lpm)	18-24gpm (68lpm-90lpm)
Hydraulic High Flow Option	-	-	-	28-38gpm (106lpm-144lpm)	28-38gpm (106lpm-144lpm)

OPTIONS - SRW-1400

Selector valve kit for tractors with single remote outlets • High speed sprocket for optional gravel reclamation configuration • Safety light kit

OPTIONS - SRW-1000

High speed sprocket for optional gravel reclamation configuration • Cat III hitch for larger hp tractors

OPTIONS - SRW-800

Mount options: Standard mount • Floating mount • Joystick control for New Holland, John Deere & Cat • Forklift tires and arms • Cat II hitch for smaller hp tractors • High speed sprocket for optional gravel reclamation configuration

OPTIONS - SMR-800

High speed sprocket for optional gravel reclamation configuration

OPTIONS - SMR-600

High speed sprocket for optional gravel reclamation configuration

Excellent for land preparation

Rototilling action

Legendary Schulte quality

SCHULTE®

Schulte Industries Ltd.
PO Box 70, Englefeld, SK Canada S0K 1N0
Ph (306) 287-3715 Fx (306) 287-3355
Email *info@schulte.ca* ***Web*** *www.schulte.ca*

MEMBER OF THE ALAMO GROUP
ALWAYS ON THE CUTTING EDGE

Certified System
ISO 9001

Sold By:

Printed in Canada *Prepared by NELSON GRAPHIC DESIGN* *201908*

Schulte is a registered trademark of Alamo Group Inc.
Schulte Industries Ltd. reserves the right to change the design and specifications of it's products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.