SCHULTE®

GX-107 ROTARY CUTTER

General Duty, 7 Foot Rigid Deck Mower

- Rigid single rotor domed, 7 gauge heavy duty deck construction
- Deck Sheds water and field debris easily
- Standard deck protection ring guards against blade to deck damage
- Pull type as well as Cat 2&3 3pt and Cat 2 quick hitch options
- Larger, more durable blade bar with 1/2" x 4" x 31" schulte super suction updraft blades for maximum cutting performance and a great 3" cutting capacity
- 540 RPM drive paired with an 80° CV shaft on trailing units for a tighter turning radius
- Five tire options: solid laminate, severe duty, severe duty foam filled, forklift tires or foam filled forklift tires
- Pull type unit accepts open clevis, solid tongue, or precision hitch options
- Heavy duty gearbox with 2.37" down-shaft and category 6 driveline
- Equipped with standard front and rear double safety chains to prevent thrown debris
- High blade tip speed at 16328 FPM creates a great cutting unit

GX-107 Specifications

SPECIFICATIONS

	GX-107
Cutting Width	84" (2.13m)
Overall Width	96" (2.43m)
Overall length, Trailing unit	65" (4.19m)
Overall length, 3-Point unit	142" (3.07m)
Transport Clearance	10" (25.4cm)
Cutting Height	3" - 13" (7.6cm-33cm)
Cutting Capacity	3" (7.6cm)
Approximate Weight	2152lbs (976kg) trailing, 1806lbs (819kg) 3pt
Hitch Type	Cat 2&3 3pt, Cat 2 quick hitch / Trailing pull
Deck Thickness	7ga (3/16", 4.6mm)
Deck protection ring	1/4" x 5.5" x 70.25"
Side Skirt	1/4" x 13.69" (6.35mm x 347mm)
Blade Tip Speed	540rpm-16328 FPM
Tractor PTO Speed	540rpm
Minimum Tractor HP	50hp (37.3kw)
Deflectors	Double chain front and rear

3pt Unit Shown

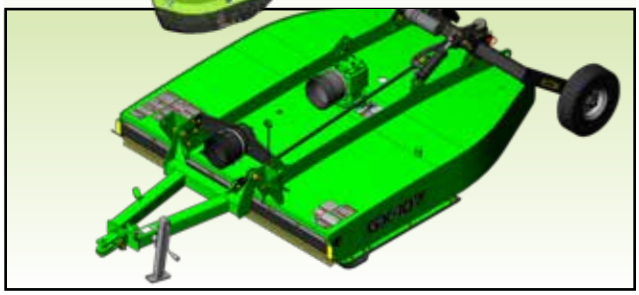

Trailing Unit Shown

Heavy Duty Gearbox with site glass and 2.37" Down-shaft

Standard Deck Protection Ring with Baffle system

Heavy Duty 1.25" blade bar

2 piece skid shoes along with standard double safety chains

AVAILABLE TRAILING HITCH OPTIONS

Open Clevis Hitch

Solid Tongue Hitch

Precision Hitch

OPTIONS - GX-107

- 3pt hitch • Trailing hitch • Standard clevis • Solid tongue
- Precision hitch • Laminate tires • Severe Duty tires
- Severe duty foam filled tires • Forklift tires
- Foam filled forklift tires

Schulte Industries Ltd.
PO Box 70, Englefeld, SK Canada S0K 1N0
Ph (306) 287-3715 Fx (306) 287-3355
Email *info@schulte.ca* Web *www.schulte.ca*

MEMBER OF THE ALAMO GROUP
ALWAYS ON THE CUTTING EDGE

Certified System ISO 9001

Sold By:

Printed in Canada *11/06/2026*

Schulte is a registered trademark of Alamo Group Inc.
Schulte Industries Ltd. reserves the right to change the design and specifications of it's products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.