GX-209 ROTARY CUTTER

General Duty, 9 Foot Rigid Deck Mower

- Rigid dual rotor domed, 7 gauge heavy duty deck construction
- Deck Sheds water and field debris easily
- Two rotor base unit common to all configuration
- Pull type as well as Cat. 2&3 3pt
- Larger, more durable blade bar with 1/2" x 4" x 25" schulte super suction updraft blades for maximum cutting performance and a great 3" cutting capacity
- 540 and 1000 RPM drive options paired with an 80° CV shaft on trailing units for a tighter turning radius
- 9.8ft / 3m overall width
- Heavy duty gear boxes with 2.37" down-shaft and category 6 drive lines
- Pull type unit has the ability to accept open clevis, solid tongue, or precision hitch options
- Five tire options: solid laminate, severe duty, severe duty foam filled, forklift tires or foam filled forklift tires
- Equipped with standard front and rear double safety chains to prevent thrown debris
- Standard deck protection ring to guard against blade to deck damage
- Standard out board rotation for a great cut and spread
- High blade tip speed at over 17000 FPM ensures a great cut

GX-209 Specifications

SPECIFICATIONS

	GX-209
Cutting Width	109.25" (2.78 m)
Overall Width	116.5" (2.96 m) Skids Inboard 120.5" (3.06 m) Skids Outboard
Overall Length	162.5" (4.1 m) Trailing Unit, 127" (3.3 m), 3 Point
Transport Clearance	11.5" (29.2 cm)
Cutting Height	2" - 13" (5.1 cm - 33 cm)
Cutting Capacity	3" (7.6 cm)
Approximate Weight	2400 lbs (1088 kg) Trailing 2300 lbs (1043 kg) 3 Point
Hitch Type	Cat 2&3 3 Point / Trailing Pull
Deck Thickness	7 GA (3/16", 4.6 mm)
Deck protection ring	1/4" x 4.5" x 44"
Side Skirt	1/4" x 13.75" (6.35 mm x 349 mm)
Blade Tip Speed	540 RPM - 17086 FPM 1000 RPM - 17355 FPM
Blade Overlap	4.75" (121 mm)
Tractor PTO Speed	540 or 1000 RPM
Minimum Tractor HP	50 HP (37.3 kW)
Deflectors	Double chain front and rear

Trailing unit shown

Heavy Duty Gearbox with site glass and 2.37" Down-shaft

2 piece skid shoes along with standard double safety chains

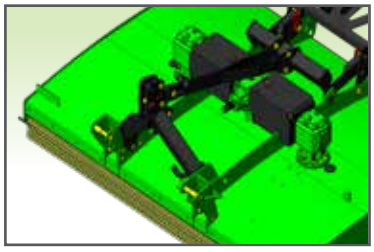

Three Point Hitch

Standard Deck Protection Ring With Baffle system

OPTIONS - GX-209

- 3pt hitch • Trailing hitch • Standard clevis
- Solid tongue • Precision hitch • Laminate tires
- Severe Duty tires • Severe duty foam filled tires
- Forklift tires • Foam filled forklift tires
- Hydraulic or Non hydraulic rear wheel beam
- 1/2 length front and rear safety belting

AVAILABLE TRAILING HITCH OPTIONS

Open Clevis Hitch

Solid Tongue Hitch



Precision Hitch

SCHULTE

Schulte Industries Ltd.
PO Box 70, Englefeld, SK Canada S0K 1N0
Ph (306) 287-3715 Fx (306) 287-3355
Email *info@schulte.ca* ***Web*** *www.schulte.ca*

MEMBER OF THE ALAMO GROUP
ALWAYS ON THE CUTTING EDGE

Certified System
ISO 9001

Sold By:

Printed in Canada *11/06/2026*

Schulte is a registered trademark of Alamo Group Inc.
Schulte Industries Ltd. reserves the right to change the design and specifications of it's products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.