


SCHULTE®

FM-300 Front Mount 3pt Hitch Frame



- Tractor Mounting System -

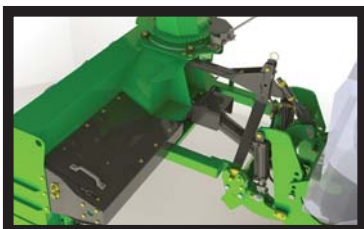

- 3pt Hook Up -


A Rugged, Versatile, Quick Attach, Frame and Drive for 3pt Snow Blowers

Enjoy the convenience, comfort and improved performance of a front mounted snow blower.

No matter how much snow you need to move you will appreciate the FM-300. The FM-300 gives you the ability to mount your 3pt snow blower on the front of your tractor instead of on the tractor's rear 3pt hitch. The FM-300 offers you better visibility and ergonomics when coupled with a Schulte Snow Blower. Blowing snow while driving forward, is more efficient than blowing snow in reverse. The FM-300 allows you an increased selection of travel speeds, as your tractor has many more forward gears than reverse gears. This increased gearing selection will result in better snow blowing performance and less wear and tear on the tractor clutch, and your neck.

G O N U M B E R O N E . . . G O S C H U L T E !

The Schulte FM-300 is designed for simple and quick tractor mounting and removal. Once mounted to the tractor all pushing force is transmitted to the snow blower through the tractor drawbar. Tension screws at the rear drawbar ensure that the tractor sees only vertical load at the frame mounting points

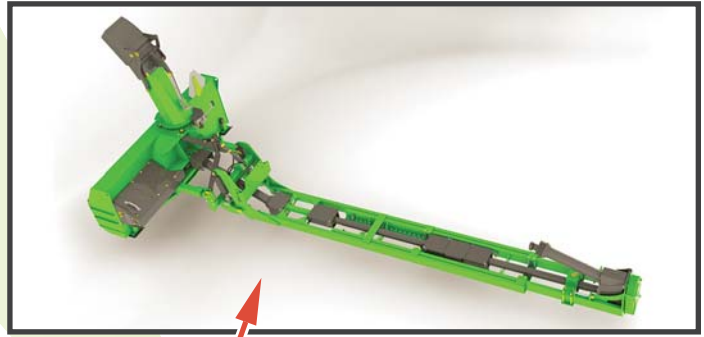

A high degree of adjustability allows the frame to accommodate different sizes of tractor tires while still maintaining the best possible ground clearance. Telescoping frame sections and telescoping drive line components allow the FM-300 to fit tractors between 151 and 211" long, measured from the front mounting plate to the tractor drawbar pin



The FM-300 is a perfect match for Schulte model SDX or RDX snow blowers. The drive line is capable of transferring 250 HP to the snow blower. Parallel shaft gearboxes are available to power either 540 RPM snow blowers (for example, the Schulte SDX960) or 1000 RPM snow blowers (for example the Schulte SDX110). The drive line is fully shielded to meet the latest safety standards


Simple attachment and removal from your tractor. A wide selection of proven tractor mounting brackets are available, for new, or older tractor models. A compact Category 2, 3PT lift mechanism ensures that the snow blower fits as close to the tractor as possible

Up to three banks of hydraulic lines can be routed to the front of the tractor to operate snow blower functions.



SPECIFICATIONS

Tractor horsepower, maximum	250 HP
Tractor PTO	1000 RPM for SDX110 and SDX960, 540 RPM for SDX960 only
Lift capacity	5000 lbs
Adjustability	Accommodates tractors between 151" and 211" measured from front mount plate to drawbar pin
Nominal ground clearance	13" depending on tractor installation
Nominal lift range	18"
Weight	1650 lbs

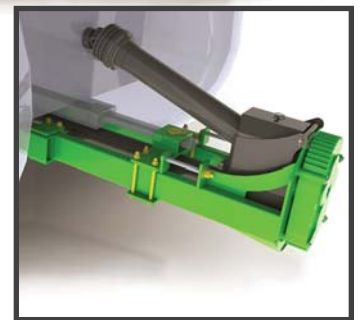

- Draw Bar Mount & PTO Power -

SCHULTE



Schulte Industries Ltd.,
 P.O. Box 70, Englefeld, Saskatchewan, Canada S0K 1N0
 Tel: (306) 287-3715 Fax: (306) 287-3355
 E-Mail: info@schulte.ca
 Visit our Web site at: www.schulte.ca



Schulte Industries Ltd. reserves the right to change the design, material and specifications of its products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment. Part No. 1000-141

Sold By: